



## PLACE OF APPLICATION

- Uninterrupted Power Sources
- Emergency Lighting
- Telecommunication
- Electric Power Stations
- Lighting for Safety Purposes
- Radiolinks
- Cash Registers, Transformer Stations of TEAŞ (Turkish Electric Enterprise) and other Enterprises
- Solar Energy and wind Force Generators

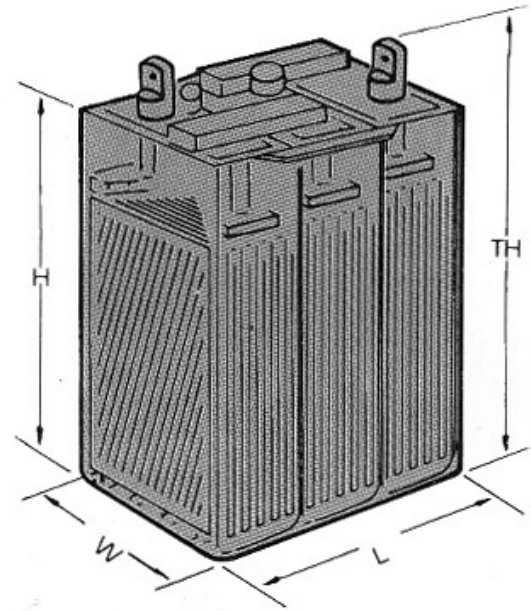

## MAJOR ADVANTAGES

- Single-wall, tubular positive plates
- Optimum performance
- Resistant to repeated rechargings
- Periodic maintenance requirement by one-year intervals
- Easy mounting and maintenance
- Application safety
- High capacity provided in minimum dimensions
- Reduced need for ventilation
- Long service life

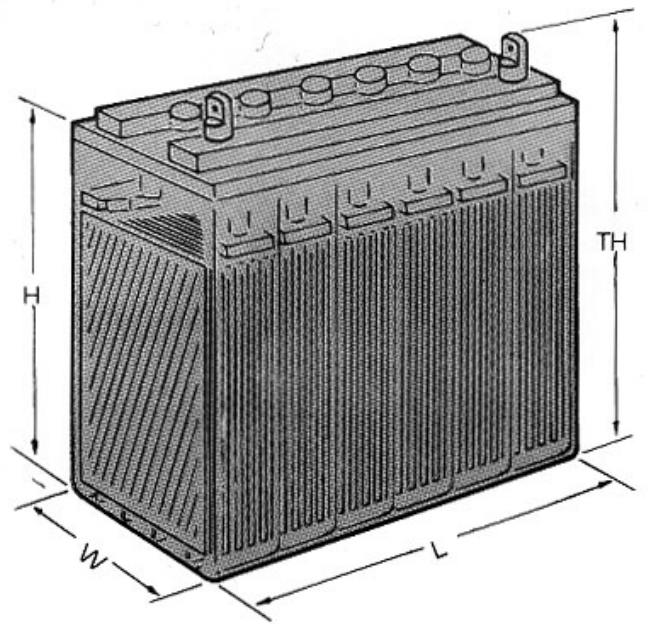

## TABLES FOR SELECTION

(Power drops to 1.8 V/cell at end of discharge.)

### 12V

TYPE	CAPACITY K <sub>10</sub> Ah	DIMENSIONS (mm)				DISCHARGE PERCENTAGE							WEIGHT (g)	
		L	W	H	TH	5'	15'	30'	45'	1h	3h	5h	DRY	WET
1 OPzS 25	25	271	165	240	277	25	22	17	14	12	6.5	4.5	16.000	22.700
2 OPzS 50	50	271	165	240	285	50	44	34	28	24	12.5	8.5	22.000	26.700
2 OPzS 100	100	272	204	330	377	95	85	65	55	45	25	17	37.500	48.100
3 OPzS 150	150	380	204	332	377	130	120	90	75	60	36	26	50.500	64.000

### 6V

TYPE	CAPACITY K <sub>10</sub> Ah	DIMENSIONS (mm)				DISCHARGE PERCENTAGE							WEIGHT (g)	
		L	W	H	TH	5'	15'	30'	45'	1h	3h	5h	DRY	WET
2 OPzS 100	100	234	204	346	387	95	85	65	55	45	25	17	21.400	43.700
3 OPzS 150	150	234	204	346	387	130	120	90	75	60	36	26	29.400	50.600